



# APPLICATIONS

A solution for all markets



LABORATORIES



ATEX AREAS



ESD AREAS







**AGV (AUTOMATIC GUIDED VEHICLES) AREAS**








**DATA ROOMS / DATA CENTRES**




**CLEANROOM & HEALTHCARE ENVIRONMENTS**

All the benefits of a GTI Tile with Evercare™ treated smooth surface and electro-conductive properties.

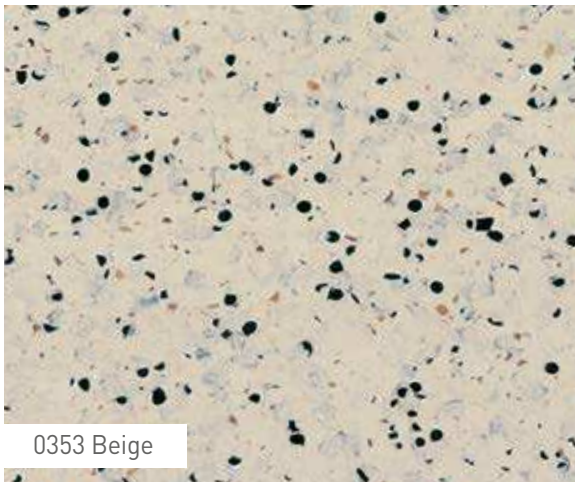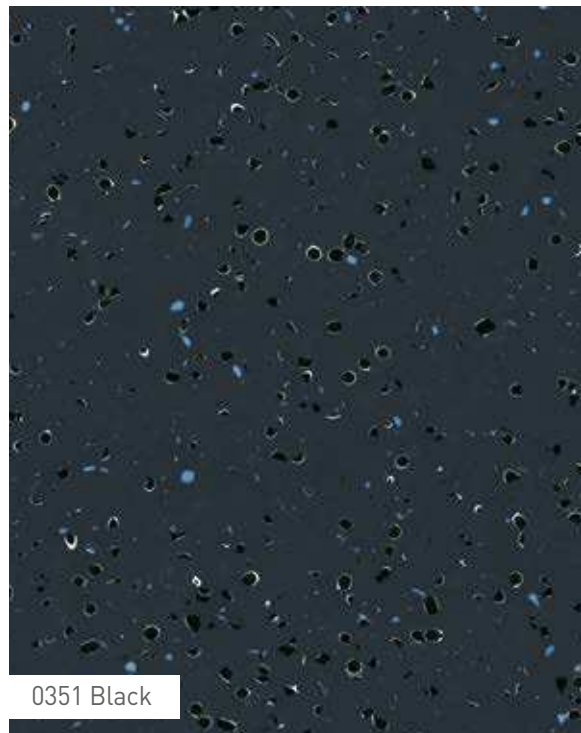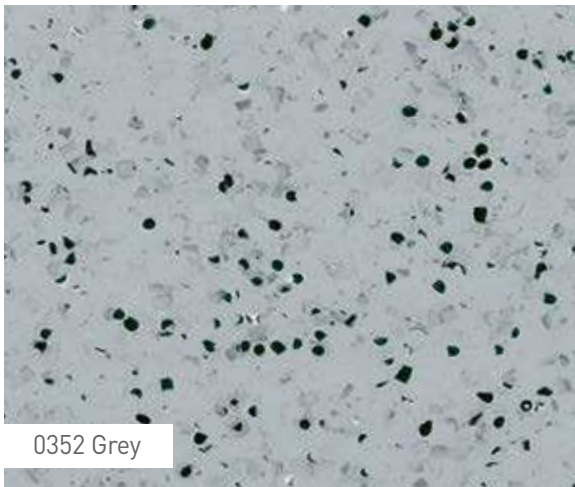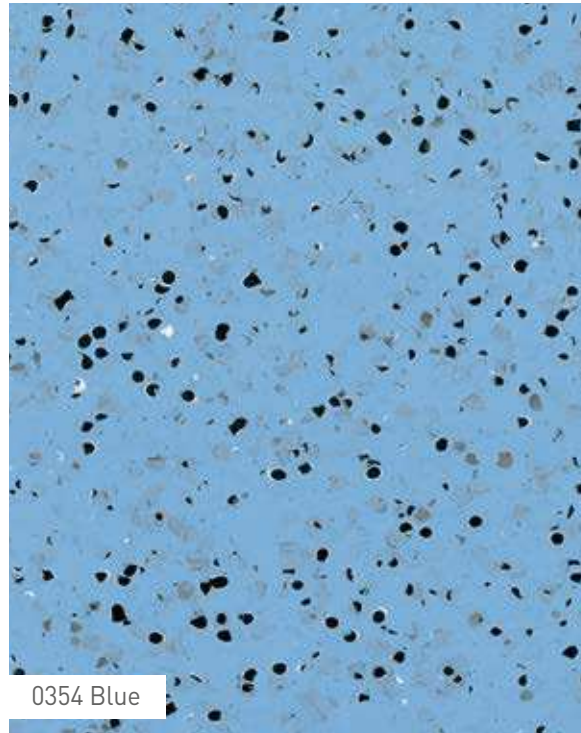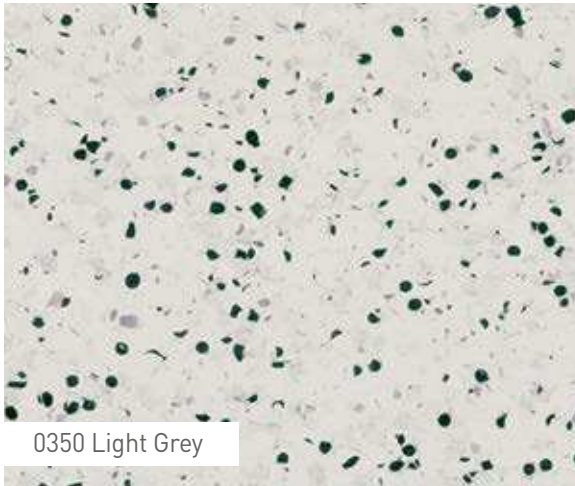




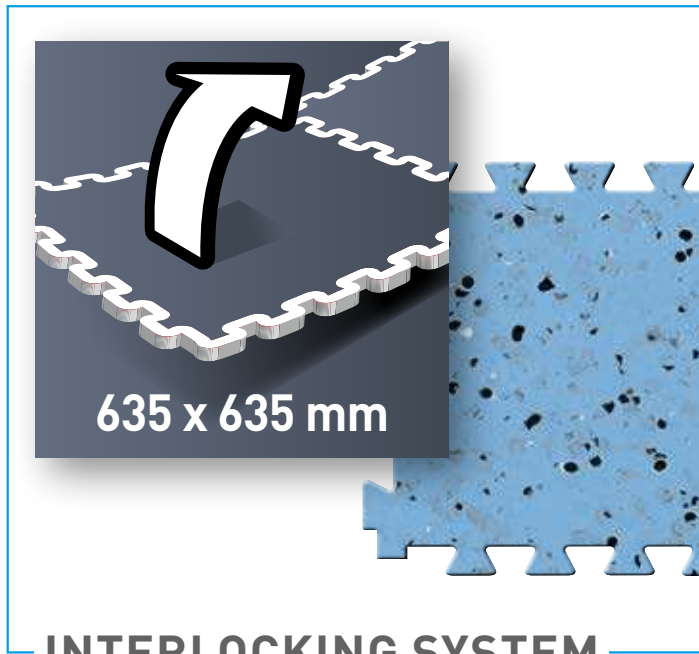

INTERLOCKING SYSTEM

**GTI EL5 CONNECT**

OR

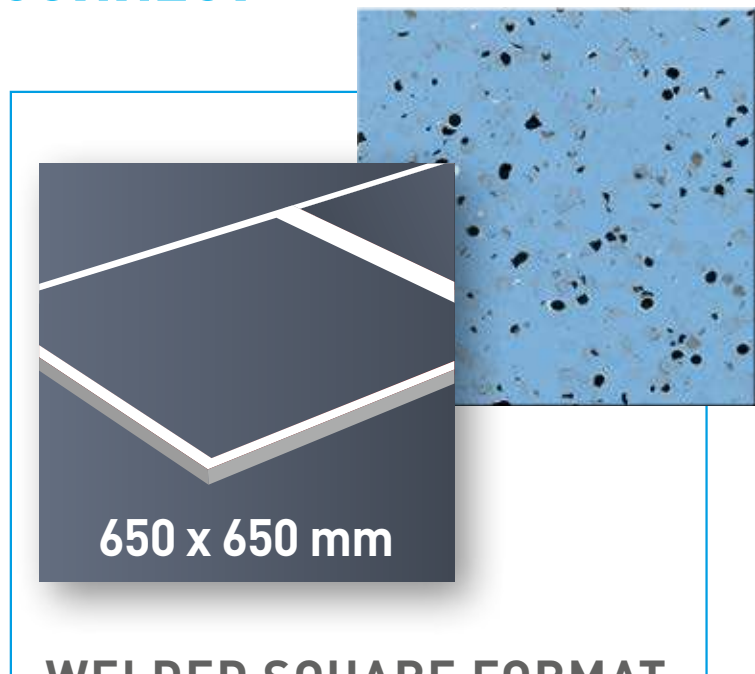

WELDED SQUARE FORMAT

**GTI EL5 CONTROL**

# ALL THE BENEFITS OF A GTI TILE...



- ▶ **Renovation solution**
- ▶ **Easy repairs** with no special tools / **Easy replacement**
- ▶ **Direct installation** on existing floor (concrete, ceramic, epoxy resin, pvc, ...) or problem subfloors (asbestos subfloor, damp subfloor, ...)



- ▶ **Fast & Easy Installation** up to 20 sqm / 215 sq. ft. per hour
- ▶ **No shut down required**
- ▶ **No lost revenues + Time saving**



- ▶ **High Traffic Resistance**
- ▶ **Withstands heavy loads**
- ▶ **Durability** will not crack / will not blister / will not break



- ▶ **Watertight System** (hot welding) with GTI EL5 Control



- ▶ **Environmentally Friendly**
  - Adhesive free
  - "VOC free" system (TVOC <math><10\mu\text{g}/\text{m}^3</math> & adhesive free)
  - 100% recyclable
  - Above 50% recycled content
  - Extremely low usage of chemical products and water for maintenance



(1) Patent pending






# ... WITH **EVERCARE™** TREATED SMOOTH SURFACE...



- ▶ Easy maintenance
- ▶ No wax for life
- ▶ Stain barrier
- ▶ Chemical resistance



- ▶ **Complete finishes package**  
to offer full coving system together  
with GTI Control (heat welded).  
100% watertight and full hygienic  
solution to meet all clean  
environments requirements

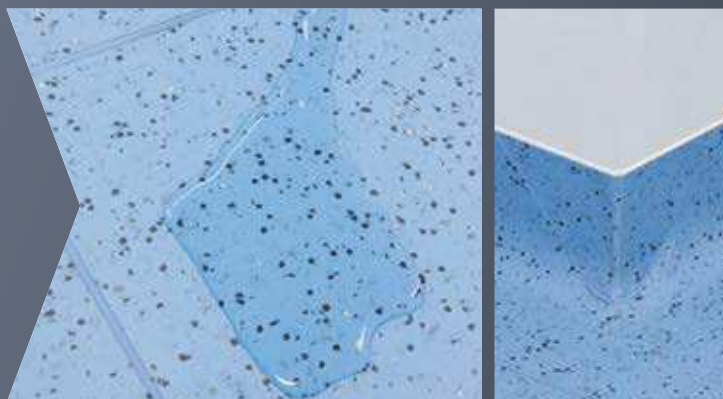



# evercare™



(1) Patent pending

# ... AND ELECTRO-CONDUCTIVE PROPERTIES

- ▶  $5 \times 10^4 \leq R_t \leq 10^6$  (EN1081 – IEC61340-4-1)  
conductive properties throughout its full life expectancy
- ▶ **Low static electrical propensity:**  
<2000V (EN1815), <100 V (IEC61340-4-5).












# GTI EL5 FINISHES

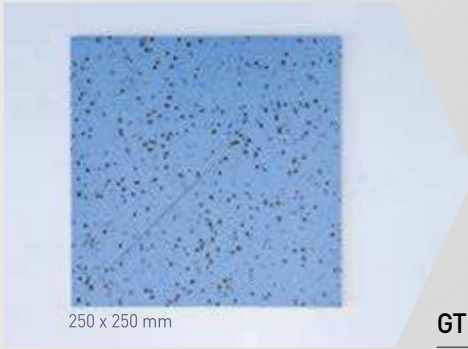

**GTI EL5 CONTROL - COVING CORNER OUT**

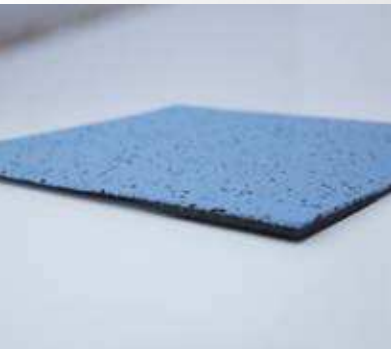

**GTI EL5 CONTROL - COVING CORNER IN**

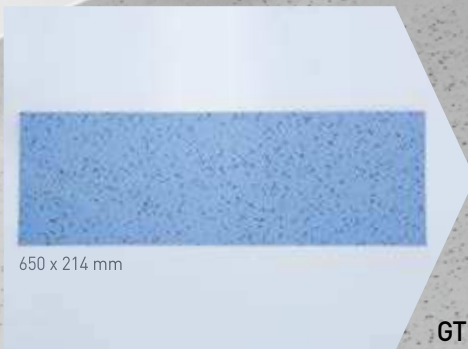

**GTI EL5 CONTROL - COVING**




**GTI EL5 CONTROL - WELDING ROD**

**WARNING:** GTI EL5 welding rods surface is black. The colour will be revealed when the installer cuts and trims the welding rods.






**ESD COPPER STRIP**

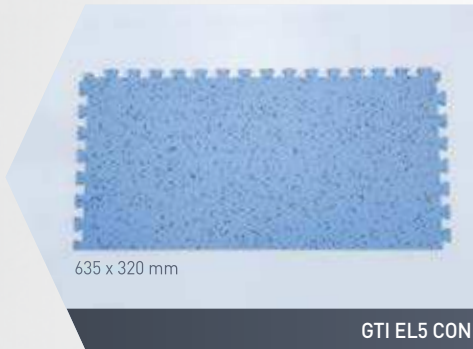

635 x 320 mm

**GTI EL5 CONNECT - ACCESS**

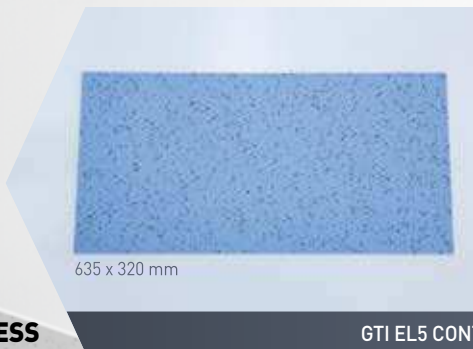


635 x 320 mm

**GTI EL5 CONTROL - ACCESS**





**GTI EL5 ACCESS**

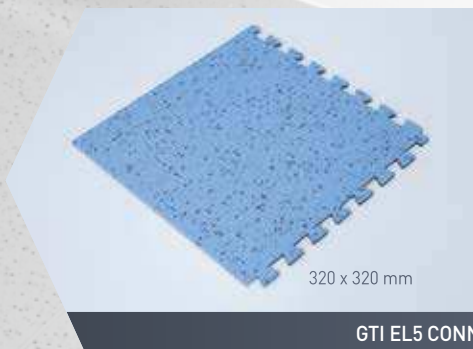

320 x 320 mm

**GTI EL5 CONNECT - CORNER**

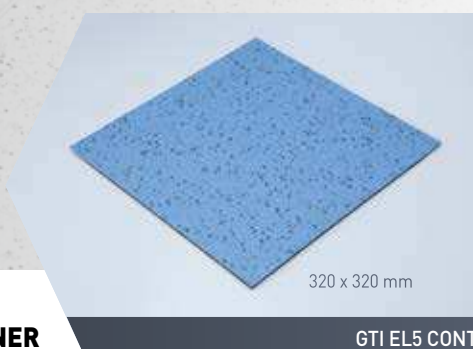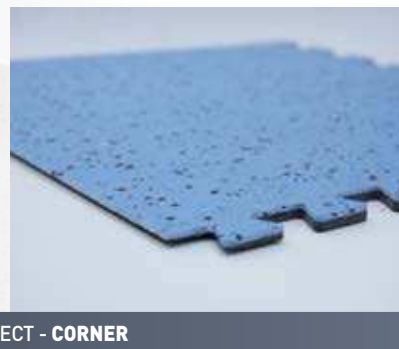

320 x 320 mm


**GTI EL5 CONTROL - CORNER**




**GTI EL5 CORNER**

# GTI EL5

## CONTROL

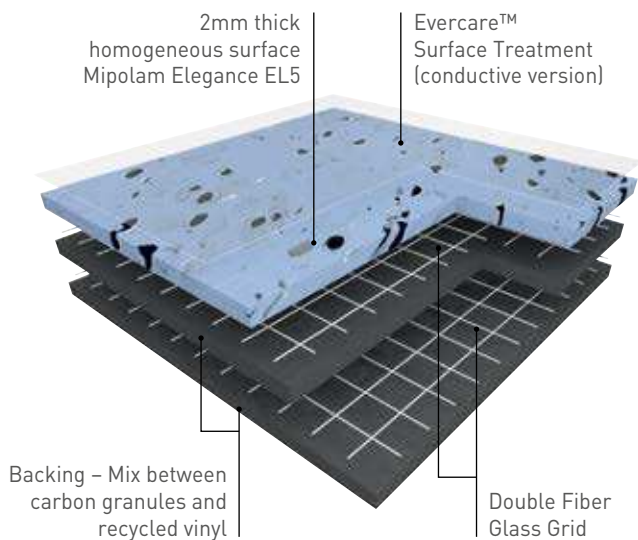

## CONNECT

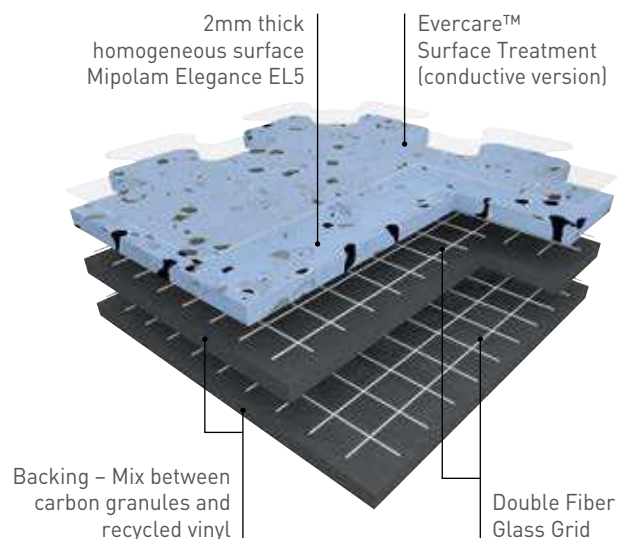

**GTI EL5 is a multi-layered loose lay vinyl tile, 6 mm thick, reinforced with 2 glass fibre grids.**

GTI EL5 tiles can be installed using interlocking system with dove tails (**GTI EL5 CONNECT**).

They are also available in **square format with welded joints** for clean environments and watertight systems requirements (**GTI EL5 CONTROL**).

GTI EL5 wearlayer is 2 mm vinyl homogeneous manufactured with continuous high pressure process, abrasion group P.

It complies with EN 649 and offers an outstanding resistance to traffic.

This floorcovering is treated with **Evercare™** technology: the latest improvements in polyurethane surface treatment obtained by UV laser cross-linking. Evercare™ offers easy maintenance and avoids staining of chemical products used in industry and healthcare, like betadine, eosin, anti-bacterial hand gel and also bio-decontamination procedures.

This treatment has excellent maintenance characteristics; it requires no wax for life!

The carbon encapsulated granules throughout its full thickness and the **conductive backing** and **conductive surface treatment** ensure optimal and consistent conductive properties throughout its full life expectancy.

**GTI EL5** acts as a continuous conductive:  $5 \times 10^4 \leq Rt \leq 10^6$  (EN1081 – IEC61340-4-1  $\leq 10^8$ ).

It has permanent antistatic properties: **<2000V (EN1815), <100 V (IEC61340-4-5)**.

**The product is non-emissive of volatile organic compounds with <10 µg/m³ (TVOC after 28 days ISO 16000-6).**

**Complementary finishes:** GTI EL5 ACCESS (access ramp), GTI EL5 CORNER (corner finishes), GTI EL5 CONTROL coving (COVING / COVING CORNER IN and COVING CORNER OUT) and conductive welding rods (GTI EL5 CONTROL WELDING RODS).



 CONTROL 650 x 650 mm	 CONNECT 635 x 635 mm	<b>Removable</b>	<b>R9</b>	<b>Evercare™</b>	 <b>100% recyclable</b>
--	--	------------------	-----------	------------------	--

## GTI EL5

### DESCRIPTION

Total thickness	EN ISO 24346 (EN 428)	mm	6
Wearlayer thickness	EN ISO 24340 (EN 429)	mm	2
Weight	EN ISO 23997 (EN 430)	g/m <sup>2</sup>	9240
Size	EN ISO 24342 (EN 427)	mm	635 x 635 (GTI EL5 CONNECT) 650 x 650 (GTI EL5 CONTROL)

### CLASSIFICATION

Norm / Product specification	-	-	EN ISO 10582 (EN 649)
European classification	EN ISO 10874 (EN 685)	Class	34-43
Fire rating	EN 13 501-1	Class	Bfl-s1
Electrical resistance	EN 1081 IEC 61340-4-1 IEC 61340-4-5 ANSI / ESD 7.1	Ω	$5 \times 10^4 \leq R_t \leq 10^6$ $\leq 10^9$ $\leq 10^9$ $2.5 \times 10^4 \leq R_t \leq 10^6$
Static electrical propensity	EN 1815 IEC 61340-4-5	kV V	< 2 $\leq 100$ <sup>(1)</sup>
Protection against electrostatic discharges	ESD S20.20 IEC 61340-5-1	- -	OK OK
Slip resistance wet: ramp test with oil	DIN 51 130	Class	R9


### PERFORMANCES

Wear resistance	EN 660.2	mm <sup>3</sup>	$\leq 4$
Wear group	(EN 649)	-	P
Type Binder content	ISO 10581 / 10582	type	I
Dimensional stability	EN ISO 23999 (EN 434)	%	$\leq 0.25$
Shore Hardness D	EN ISO 868	HD	$\geq 90$
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK
Thermal conductivity	EN ISO 10456 (EN 12524)	W/(m.K)	0.25
Colour fastness	EN 20 105 - B02	Degree	$\geq 6$
Surface treatment	-	-	Evercare™
Chemical product resistance	EN ISO 26987 (EN 423)	-	good

### ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days	ISO 16000-6	µg / m <sup>3</sup>	<10
Certification	-	-	Floorscore®

### CE MARKING

	EN 14041	  
		

(1) Measured with ESD shoes (type ABEBA and UVEX).

gerflor.com

ARCHITECTURE  
DECORATION  
SPORT  
TECHNOSPECIFIC

**ASIA:** Gerflor Asia

Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998  
e-mail: gerflorasia@gerflor.com

**AUSTRALIA/NEW ZEALAND:** Gerflor Australasia Pty. Ltd  
Australia Tel: 1 800 060 785 - New Zealand Tel: 0 800 630 119  
e-mail: gerflor@gerflor.com.au

**AUSTRIA/SWITZERLAND:** Gerflor GmbH  
Tel: +43 (0)72 29/70 800-0 - Fax: +43 (0)72 29/70 800-218  
e-mail: austria@gerflor.com - switzerland@gerflor.com

**BELGIUM/LUXEMBURG:** Gerflor Benelux  
Tel: +32 (0)3 766 42 82 - Fax: +32 (0)3 766 29 14  
e-mail: gerflorbel@gerflor.com

**CANADA:** Gerflor Canada  
Tel: +1 438 333 0752 - Fax: +1 438 380 5425  
e-mail: gerflorcanada@gerflor.com

**CHINA:** Gerflor floorings (China) Co. Ltd.  
Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998  
e-mail: gerflorchina@gerflor.com

**FINLAND:** Gerflor Oy  
Tel: +358 (0) 10 6 17 5150 - Fax: +358 (0) 10 617 5152  
e-mail: info@gerflor.fi

**FRANCE:** Gerflor - Service Express:  
 N° Azur 0 810 569 569  N° Azur FAX 0 810 569 570  
e-mail: contactfrance@gerflor.com

**GERMANY:** Gerflor Mipolam GmbH  
Tel: +49 (0)22 41-25 30-0  
e-mail: gerflormipolam@gerflor.com  
Kunden-Service  
Tel: +49 (0) 22 41-25 30-136 - Fax: +49 (0) 22 41-25 30-100  
e-mail: kundenservice@gerflor.com  
SAT Service und Anwendungstechnik  
tel: +49 (0)22 41-25 30 555 - Fax: +49 (0)22 41-25 30 550  
e-mail: technik@gerflor.com

**IRELAND:** Gerflor Ltd  
Tel: +353 (0) 42 966 1431 - Fax: +353 (0) 42 966 1759  
e-mail: gerflorirl@gerflor.com

**ITALY:** Gerflor S.p.A.  
Tel: +39 02 90 40 10 - Fax: +39 02 90 42 74 84  
e-mail: gerfloritalia@gerflor.com

**LATIN AMERICA (Brazil):** Gerflor América Latina  
Tel: +55 11 38 48 20 20  
e-mail: gerflor@gerflor.com.br

**MIDDLE EAST:** Gerflor Middle East  
Tel: +966 13 847 1779 - Fax: +966 13 847 1781  
e-mail: info@gerflorme.com

**NETHERLANDS:** Gerflor Benelux  
Tel: +31 (0)40 266 17 00 - Fax: +31 (0)40 257 46 89  
e-mail: gerflornl@gerflor.com

**OTHER COUNTRIES:** Gerflor International  
Tel: +33 (0)4 74 05 40 00 - Fax: +33 (0)4 74 05 03 13  
e-mail: gerflorcontract@gerflor.com

**POLAND:** Gerflor Polska Sp z o.o  
Tel: + 48 61 823 34 01 - Fax: + 48 61 823 34 33  
e-mail: info@gerflor.pl

**PORTUGAL:** Gerflor Iberia, SA  
Tel: +351 21 843 95 49 - Fax: +351 21 846 55 44  
e-mail: gerflorportugal@gerflor.com

**RUSSIA:** Gerflor zao  
Tel./Fax: + 7 495 785 23 71  
e-mail: gerflorrussia@gerflor.ru

**SCANDINAVIA:** Gerflor Scandinavia a.s.  
Tel: + 47 64 95 60 70 - Fax: + 47 64 95 60 80  
e-mail: gerflorscand@gerflor.no

**SPAIN:** Gerflor Iberia, SA  
Tel: +34 91 653 50 11 - Fax: +34 91 653 25 85  
e-mail: gerfloriberia@gerflor.com

**UNITED KINGDOM:** Gerflor Ltd  
Sample service: Contractuk@gerflor.com  
Office Tel: + 44 (0) 1926 622 600 - Fax: + 44 (0) 1926 401 647

**USA:** Gerflor North America  
Tel: 877 GERFLOR (437 3567) - Fax: 847 394 3753  
e-mail: info@gerflorusa.com



**Gerflor.** Don't forget our complementary ranges!



Handrails



Wall Coverings & Protections



Entrance mats



Skirtings & Profiles

and Be CONNECTED!



www.gerflor.com

**Gerflor**<sup>®</sup>  
theflooringgroup